

Doors of Distinction - Pre-Glazed Hardwood Exterior Doors and Sidelights

EXTERIOR DOOR SPECIFICATIONS

Meranti Hardwood: (A-Grade) 44mm thick and Engineered Construction and supplied unstained for on site finishing. The pre-glazed doors generally feature decorative raised mouldings around the panels and the glazing apertures on one side only. Colours of the timber vary from dull beige to red-brown, but are colour matched as near as possible within each door. Suitable for light to dark colour staining with 'SIKKENS' products, or painting using suitable primer, please ask for instructions at time of ordering

Oak: Exterior Doors are manufactured using an engineered construction to give extra stability. Each door has Raised Mouldings to both sides (in some designs front of door only) and incorporate camings as described below.

Stiles and Head Rail are generally aprox.125mm (Ex 5") and panels are Raised and Fielded on both sides and sealed in with mastic.

Pre-glazed Doors: are manufactured with traditional hand made lead lights, (some available brass or zinc coming), with clear bevelled glass, cracked ice glass and coloured lights in some designs, which are sandwiched between two peices of toughened glass, giving a Triple glazed unit to facilitate safety, security and ease of cleaning.

Due to traditional methods of glazing, a small amount of rattling in the glass can occur occasionally. This is not considered a defect.

Photographic reproduction depends on which background the doors were photographed.

Timber colour depends on whether the door in the photograph is natural or has been stained.

*Some doors may contain stiles and rails engineered from composite or laminated materials with laminated face veneers

ESSENTIAL DOOR CARE

Fitting Advice

- Reduce doors to fit equally from both sides, but not excessively, e.g. maximum of 7mm from each side.
- Seal the door with one coat of 'Sikkens HLS' before first fix, then taking off all ironmongery coat every surface liberally with a minimum of 2 coats of 'Sikkens Filter 7', including all cut outs, before refitting.
- The number of coats advised by the manufacturer is usually a minmum, it is therefore wise to exceed this if possible.
- Fully seal glass rebates and backs of glazing beads prior to glazing on models supplied without glass.
- Never fit mortice locks etc. at rail joints as this may seriously weaken them, and use a minimum of three 4" hinges.
- Always fit with suitable weatherboard regardless of frame cill type fitted, to prevent droplets of moisture hanging from the bottom of the door.

Single Door Sizes

Code	Metric	Imperial
H	762mm x 1981mm	30" x 78"
I	813mm x 2032mm	32" x 80"
J	838mm x 1981mm	33" x 78"
L	864mm x 2083mm	34" x 82"
M	914mm x 1981mm	36" x 78"
N	914mm x 2134mm	36" x 84"

Pair Door Sizes

M	914mm x 1981mm	36" x 78"
O	1067mm x 1981mm	42" x 78"
P	1117mm x 1981mm	44" x 78"
Q	1168mm x 1981mm	46" x 78"
R	1220mm x 1981mm	48" x 78"
S	1372mm x 1981mm	54" x 78"
T	1524mm x 1981mm	69" x 78"

Sidelight Sizes

Code	Metric	Imperial
S1A	381mm x 1981mm	15" x 78"
S1	406mm x 1981mm	16" x 78"
S2	406mm x 2032mm	16" x 80"
S4	457mm x 1981mm	18" x 78"
S5	457mm x 2057mm	18" x 81"
S6	584mm x 2040mm	23" x 80"

Sidelights are specifically made for cutting to size:

maximum of 60mm off each side and top edges,

as long as they are a fixed feature e.g.

(non opening sidelight)

Please consult web site for latest availability on sizes:

www.doorsofdistinction.co.uk

IMPORTANT

Re-coat your door every 2-3 years depending on wear and tear that can be observed.

It is also important to protect your door from direct sunlight and rain by means of a porch, canopy or similar construction

WE CANNOT REPLACE A FAULTY DOOR AFTER ALTERATIONS HAVE BEEN CARRIED OUT.

Hardwood Door Frame Kits

(Door Size quoted)


Single Doors

30" x 78" - 762mm x 1981mm
 32" x 80" - 813mm x 2032mm
 33" x 78" - 838mm x 1981mm
 34" x 82" - 864mm x 2083mm
 36" x 84" - 914mm x 2134mm

Double Doors

36" x 78" - 915mm x 1981mm
 42" x 78" - 1067mm x 1981mm
 46" x 78" - 1168mm x 1981mm
 48" x 78" - 1220mm x 1981mm
 54" x 78" - 1372mm x 1981mm

All including Frame seal and Water bar

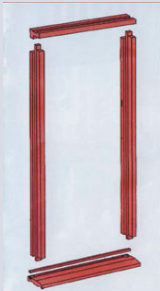

Hardwood Vestible Frame Kits (Door Size quoted)

Single Door + 2 sidelights

A) 33" x 78" - 838mm x 1981mm single door plus 2 -18" sidelights
 aprox.overall frame sizes 1904mm wide


B) 33" x 78" - 838mm x 1981mm single door plus 2 -21" sidelights
 aprox.overall frame sizes 2056mm wide

Double Doors + 2/ 18"sidelights

C) 59.5" x 78" - 1512mm x 1981mm pair of doors plus 2 -18" sidelights
 aprox.overall frame sizes 2586mm wide

D) 65.5" x 78" - 1664mm x 1981mm pair of doors plus 2 -18" sidelights
 aprox.overall frame sizes 2738mm wide

All including Frame seal and Water bar

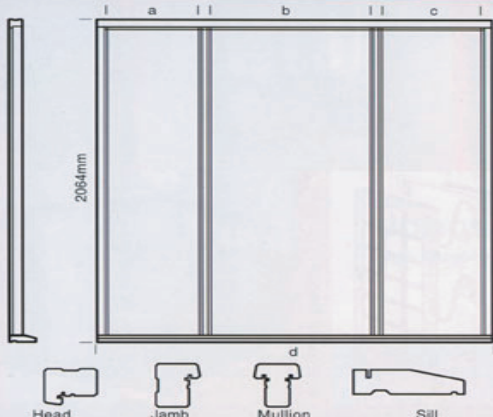

'Doors of Distinction'

Dorset Branch: 63 Cobham Rd - Ferndown Industrial Estate - Ferndown - Dorset - BH21 7QF

Devon Branch: 1 The Old Sawmills - Hawkerland Road - Colaton Raleigh - Sidmouth - Devon - EX10 0BH

For Sales Enquiries please contact: sales.doorsofdistinction.co.uk or Tel: Dorset 01202 872211 - Devon 01395 567348